FORM NO. 51-4AA FEB 1952

CENTRAL INTELLIGENCE AGENCY

50X1-HUM

CLASSIFICATION

SECURITY INFORMATION

INFORMATION REPORT

TORNATION REPORT

CD NO.

COUNTRY Czechoslovakia

DATE DISTR.

10 December 1952

SUBJECT

Czech 7.65 mm. Automatic Pistol

NO. OF PAGES

1 (2 pages)

2

DATE OF INFO.

NO. OF ENCLS.

50X1-HUM

PLACE ACQUIRED SUPPLEMENT TO REPORT NO.

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE
OF THE UNITED STATES, WITHIN THE MEANING OF TITLE 18, SECTIONS 793
AND 794, OF THE U.S. CODE, AS AMENDED. ITS TRANSMISSION OR REVELATION OF ITS CONTENTS TO OR RECEIPT BY AN UNAUTHORIZED PERSON IS
PROMIBITED BY LAW. THE REPRODUCTION OF THIS FORM IS PROMIBITED.

THIS IS UNEVALUATED INFORMATION

50X1-HUM

1.			Czech	7.65	automatic
	pistol	issued to SNB, StB, and PS troops in 19			

- this pistol, manufactured by Ceska Zbrojovka in Strakonice, is also being produced for commercial export. It handles 7.65 mm. (.32 Colt Auto) ammunition. It is a blowback type with the barrel rigidly fixed to the receiver. The recoil spring encircles the barrel 2. The marking NB 50 on the receiver is a model designation and indicates the year of manufacture.
- 3. Special features of this pistol, in addition to the double action trigger, are the exposed hammer with a rounded spur, a cartridge indicator which protrudes slightly from the left side of the slide when a cartridge is in the chamber, and the safety lever located on the upper left side of the receiver. This safety is arranged so that when rotated to the safe position, it releases the hammer to the uncocked position. The hammer is a rebound type; it is blocked from contacting the firing pin unless the trigger is pulled far enough rearward to actuate the sear.
- t. Instructions for field stripping are as follows. After withdrawing the magazine, depress disassembly catch on the right side of the receiver and pull slide rearward and upward until it disengages. Allow the slide to move forward under spring pressure, and remove recoil spring from the barrel.

CLASSIFICATION

SECRET

STATE #	х	NAVY	#	х	NSRB	DISTRIBUTION	
ARMY #	x	AIR	#	x	FBI	OSI/Weapons Ev x	

SECRET/SECURITY INFORMATION

5. Characteristics of the weapon are:

(a) Magazine capacity: eight rounds

(b) Magazine catch: on left side of receiver, behind trigger

(c) Sights: U netch rear; patridge blade front

(d) Rifling: six groeves; uniform right hand pitch

(e) Stocks: brown plastic

(f) Barrel length: 3.75 inches

(g) Over-all length: 6.60 inches

(h) Height: 4.35 inches

(1) Maximum thickness: 1.10 inches

(j) Weight: 23.8 ounces

(k) 50X1-HUM

7.55 also in the circle; Ceska Zbrojovka Nar Podnik Strakonice. On receiver, NB 50.

-ond-

50X1-HUM

50X1-HUM

50X1-HUM

this pistol is of relatively recent introduction because of its double action trigger mechanism which closely resembles the PP and PPK Walther. The pistol also resembles a late pattern Bergmann 7.65 mm. automatic pistol

Enclosure : Drawing of 7.65 mm. Automatic Pistol

SECRET

produced in Suhl, Germany.

SECRET

SECRET SECURITY INFORMATION Part I 7.65 mm Autometic Pistol 50X1-HUM Right View SECRET SECURITY INFORMATION

50X1-HUM

SECRET SECURITY INFORMATION


Enclosur e


Part II

Czech 7.65 mm Automatic Pistol

Field Stripped



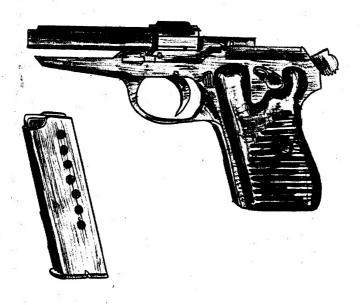



-2-

SECRET SECURITY INFORMATION